


Schraubenbolzen

Double end studs

DIN 2509

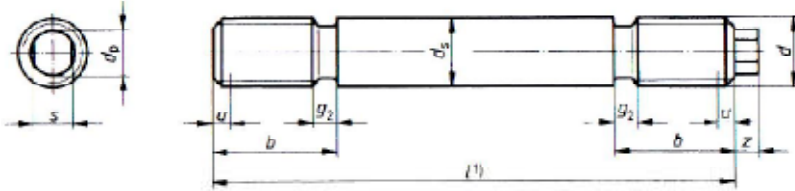

d	M 12	M 16	M 20	M 24	M 27	M 30	M 33	M 36	M 39	M 42			
b max.	23,5	28	34	40,5	42,5	47	49	56	58	64			
b ₂ max.	25,5	31	37	44,5	47,5	52	55	61	64				
v ₁ min.	13,5	17	21	25	28	31	33	37	39	43			
d _s min.	11,82	15,82	19,79	23,79	26,79	29,79	32,75	35,75	38,75	41,75			
d _p min.	7,78	11,73	13,73	13,73	17,73	17,73	24,67	24,67	27,67	27,67			
s max.	7	10	11	11	13	13	22	22	24	24			
z	4	5	6	6	6	6	9	9	10	10			

Lagerartikel - Preise auf Anfrage

Werkstoff: Stahl entsprechend Normvorschrift

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE