


Kegelstifte
mit Gewindezapfen und konstanten Kegellängen
taper pins with thread and constant taper length

DIN 258

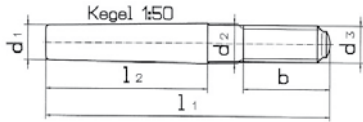

d1 h10	5	6	8	10	12	13	14	16	20	25	30	
b	14	18	22	24	27	27	30	35	35	40	46	
d2 -	5,5	6,6	8,8	10,9	13,1	14,2	15,3	17,4	21,7	27	32,2	
d3	M 5	M 6	M 8	M 10	M 12	M 12	M 12	M 16	M 16	M 20	M 24	
l2	25	30	40	45	55	60	65	72	85	100	110	

Länge L

40	LG		LG									
45	LG	LG	LG	LG								
50	LG	LG	LG	LG								
55		LG	LG	LG								
60	LG	LG	LG	LG		LG						
65		LG	LG	LG	LG		LG	LG				
75			LG	LG	LG	LG						
85			LG	LG	LG	LG	LG	LG	LG			
100			LG	LG	LG	LG	LG	LG	LG	LG		
120			LG	LG	LG	LG	LG	LG	LG	LG	LG	
140				LG	LG	LG	LG	LG	LG	LG	LG	
160					LG	LG	LG	LG	LG	LG	LG	LG
190								LG	LG	LG	LG	LG

LG - Lagerartikel - Preise auf Anfrage

Werkstoff: Werkstoffe: Stahl entsprechend Normvorschrift auch V2A am Lager

WWW.GLOBEX-GMBH.DE

WWW.GLOBEX-GMBH.DE