


Sechskantschrauben 8.8

mit Ansatzspitze und Auslauf

hexagon set screws with half point and cone end

DIN 564

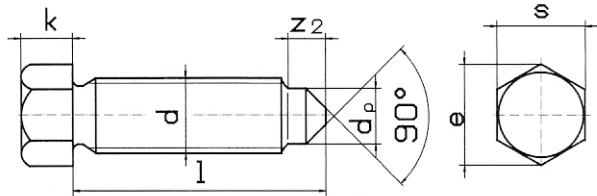

d	M 6	M 8	M 10	M 12	M 16	M 20	M 24	M 30				
d p	4	5,5	7	8,5	12	15	18	23				
e	8,79	11,05	14,38	17,77	19,92	26,75	33,53	39,98				
k	5	6	7	9	11	14	17	21				
s	8	10	13	16	18	24	30	36				
Z 2	3	4	5	6	8	10	12	15				

Länge L

12	LG											
16	LG	LG										
20	LG	LG	LG									
25	LG	LG	LG	LG								
30	LG	LG	LG	LG	LG							
35	LG	LG	LG	LG	LG							
40	LG	LG	LG	LG	LG	LG						
45		LG	LG	LG	LG	LG	LG					
50		LG	LG	LG	LG	LG	LG	LG				
60		LG	LG	LG	LG	LG	LG	LG	LG			
70				LG	LG	LG	LG	LG	LG			
80				LG	LG	LG	LG	LG	LG			
90				LG	LG	LG	LG	LG	LG			
100				LG	LG	LG	LG	LG	LG			
120					LG	LG	LG	LG	LG			

LG - Lagerartikel - Preise auf Anfrage

Werkstoff: Stahl entsprechend Normvorschrift
auch V2A und V4A am Lager

andere Werkstoffe, Güten und Abmessungen aus Vorrat oder kurzfristig lieferbar, bitte anfragen

WWW.GLOBEX-GMBH.DE